




KNIGHT FIRE & SECURITY PRODUCTS LTD
Unit 84, Seawall Road Industrial Estate
Tremorfa, Cardiff CF24 5TH
Tel: 00 44 29 20 48 81 29
Fax: 00 44 29 20 48 91 32
<mailto:info@knightfireandsecurity.com>



INSTALLATION INSTRUCTIONS

SINGLE PUSH PANIC BUTTON

Part Code: KP1S Security Grade 1 Environmental Class 2 With Lid Tamper & Reed

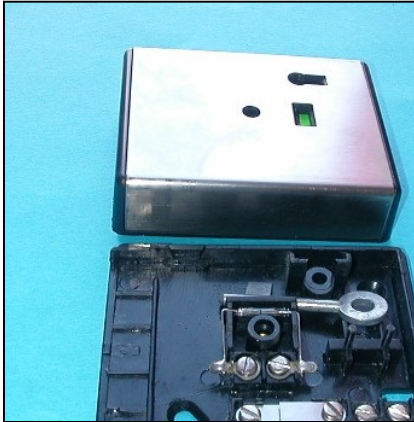

- 1 Screw the unit base to mounting surface.
- 2 Connect your alarm circuit wires to the reed terminals T1 and T2. This will create the circuit. Once the button is pressed in the circuit will be broken.
- 3 Attach your tamper wires to terminals T3 and T4. If the lid is removed the tamper will activate.

Other terminals are spare.

- 4 Carefully fit the lid to the central post on the base.
- 5 Ensure no snagging occurs.
- 6 Operation:- Push End button inwards.
- 7 Reset :- by using the reset key (supplied)

29mm Deep o/a

