


## Üle GPRS kanali winload' ga keskuse seadistamine

1. Gsm kommunikaator PCS200 peab olema ühendatud pesasse SERIAL keskklaadil.
2. Sektsiooni 2960-2961 peab olema sisestatud pöördumispunkt (sõltub operaatorist)
3. Sektsiooni 2966 peab olema sisestatud port 10000

The screenshot shows the 'System Options' window with the 'Reporting Codes' tab selected. The 'GSM Options' sub-tab is active, showing various configuration fields. The 'SMS programming' sub-tab is also visible. The 'GSM provider parameters' section includes fields for 'Access point name', 'Access point user name', and 'Access point password'. The 'GSM IP Port' is set to 10000.

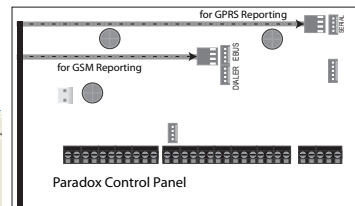

4. Nüüd tuleb saata PCS200 kommunikaatorile SMS : P(salasõna).IP.(oma telefoni number)  
Nt. Padmin.IP.5077777 Salasõna leiad sektsioonist 3013

The screenshot shows the [3013] GPRS Installer password field. The password 'admin' is entered in the text box.

5. Nüüd saadab PCS200 SMSi tagasi koos IP aadressiga, mis tuleb sisestada keskuse informatsiooni

The screenshot shows the 'GSM/GPRS parameters' tab in the configuration software. The 'Direct connect (public IP address available)' section is expanded, showing the 'IP Address' as 172.29.14.242 and the 'IP Port' as 10000. The 'Call-back' section shows the 'PCS module phone number' as %@533401155 and the 'Wait for IP call-back Port' as 10001. The 'Module Password' is set to admin.

6. Ühenduse tüübiks tuleb valida PCS module call back ja vajutada CONNECT

The screenshot shows a dialog box for selecting the connection type. The 'Choose connection type' dropdown is set to 'PCS module call back [CTRL + F8]'. The 'Connect' button is visible.

7. Peale vajutamist CONNECT ilmub ekraanile aken (Connection Progress)

Nüüd tuleb saata PCS200 kommunikaatorile SMS kirjaga, mis ilmub aknas Nt. Padmin.A88.196.2.95.P10001

The screenshot shows the 'Connection Progress' dialog box. The title bar reads 'GSM Connection'. The main text says 'To start the call back connection send the following SMS to the PCS module:' followed by the SMS content 'Padmin.A88.196.2.95.P10001' in a red box. Below this, it says 'Waiting for PCS module to call back...'. At the bottom, there is a 'Cancel' button and a timestamp 'Time elapsed since connection was launched: 00:00:01'.

8. Peale SMSi saatmist helistab keskus tagasi ja ühendus on loodud.

Ruuteris peab olema port 10001 suunatud Teie arvutisse