



PGFT-12V110H

Front Terminal AGM

PG FT Series - Front Terminal



Front terminal AGM batteries simplify installation and maintenance in telecom and UPS racks. High energy density and robust grid design enable reliable backup with streamlined service access for telecom and data center applications.

Performance Specs

Nominal Voltage 12.0 Volts, (6.0 cells)

Nominal Capacity

20-hr. (5.29A to 10.8 Volts)	105.8Ah
10-hr. (10.1A to 10.8 Volts)	101.0Ah
5-hr. (17.7A to 10.2 Volts)	88.5Ah
1-hr. (66.4A to 9.6 Volts)	66.4Ah

Approximate Weight 69.45lbs, (31.5kg)

Dimensions

+/- 0.08 in. (+/- 2mm) for length, width, and height dimensions

L: 15.51in, 394.0mm
W: 4.33in, 110.0mm
H: 11.26in, 286.0mm
TH: 11.26in, 286.0mm

Internal Resistance (approx.) mΩ 5.5mΩ

Max Short Circuit Discharge Current 1900.0A

Operating Temperature Range

Charge	-4°F (-20°C) to 104°F (40°C)
Discharge	5°F (-15°C) to 122°F (50°C)


Case ABS (UL94 HB or V-0 optional)

Recommended Power-Sonic Charger PSC-126000ACX

Configuration Options

- PGFT-12V110H FR M6
- PGFT-12V110H M6

Available Terminals (mm)



Torque: 2.0~3.0 Nxm



To ensure safe and efficient operation always refer to the latest edition of our Technical Manual, as published on our website. © 2026. Power-Sonic Corporation. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.

Updated 8/18/2026 4:30 PM


Version 1.2

Graphs

Capacity Retention SLA




PS Cycle Life

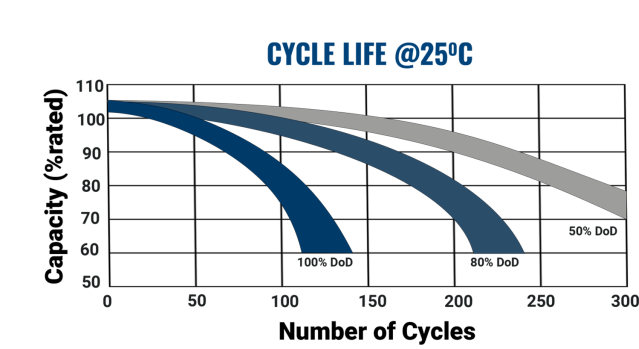

SLA Charging



SLA Float Life 10YR

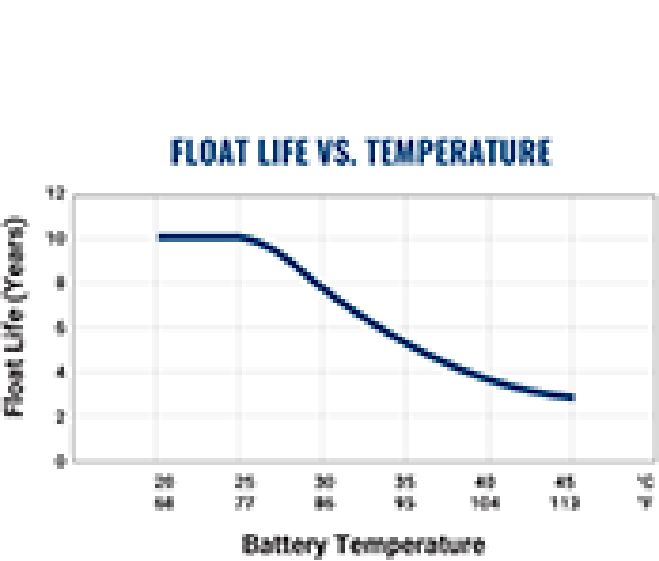

Constant Current

VoltageOverTime	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V/cell	184.1	147.4	110.6	81.1	66.4	47.7	38.4	28.4	22.3	18.5	14.9	12.7	10.6	5.58
1.65V/cell	172.8	139.3	105.7	78.0	64.2	46.2	37.2	27.5	21.7	18.1	17.83	12.5	10.5	5.51
1.67V/cell	171.8	138.3	104.7	77.2	63.4	45.7	36.8	27.4	21.6	17.9	14.8	12.4	10.4	5.48
1.70V/cell	166.6	134.4	102.1	75.4	62.1	44.8	36.2	27.0	21.3	17.7	14.7	12.3	10.2	5.38
1.75V/cell	157.6	127.7	97.8	72.5	59.9	43.4	35.1	26.2	20.8	17.3	14.4	12.1	10.1	5.29
1.80V/cell	149.0	121.3	93.6	69.7	57.7	42.0	34.1	25.6	20.3	16.9	14.3	11.9	10.0	5.27
1.85V/cell	128.1	105.4	82.7	62.4	52.2	38.3	31.3	23.6	18.8	15.7	13.5	11.1	9.32	4.91

Constant Power

VoltageOverTime	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V/cell	334.3	269.4	204.5	151.3	124.7	90.2	73.0	54.5	43.1	35.8	29.8	24.9	20.6	10.9
1.65V/cell	318.8	258.0	197.2	146.3	120.8	87.7	71.2	53.1	42.2	35.1	29.6	24.5	20.4	10.8
1.67V/cell	317.8	256.9	196.0	145.3	120.0	87.1	70.6	52.9	41.9	34.9	29.5	24.4	20.3	10.7
1.70V/cell	309.8	251.0	192.2	142.9	118.2	85.9	69.7	52.3	41.4	34.6	29.2	24.2	20.1	10.7
1.75V/cell	296.5	241.2	185.8	138.5	114.8	83.5	67.9	51.0	40.6	33.9	28.8	23.8	19.8	10.5
1.80V/cell	283.2	231.3	179.3	134.1	111.5	81.4	66.3	49.9	39.7	33.2	28.5	23.4	19.6	10.4
1.85V/cell	246.1	203.0	159.9	120.9	101.4	74.6	61.2	46.3	37.0	31.0	27.2	21.9	18.4	9.89




To ensure safe and efficient operation always refer to the latest edition of our Technical Manual, as published on our website. © 2026. Power-Sonic Corporation. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.

Charging

Cycle Applications: Apply constant voltage charge at 2.35VPC – 2.45VPC (14.1 to 14.7 volts for 12V Monobloc) at 20°C. The initial charging current should be set at less than C/5 Amps. Switch to float charge when the current falls to a 3% capacity rate to avoid overcharging. **Stand-By or "Float" Service:** Apply constant voltage charge of 2.25VPC – 2.30VPC (13.5 to 13.8 volts for 12V Monobloc) at 20°C. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition. **Temperature Compensation:** Charging voltage for both cyclic and stand-by applications should be regulated in relation to ambient temperature. As temperature rises, charging voltage should be reduced to prevent overcharge and increased as the temperature falls to avoid undercharge. For further charging information, including temperature compensation factors, see the Power-Sonic Technical Manual.

Engineering Drawing

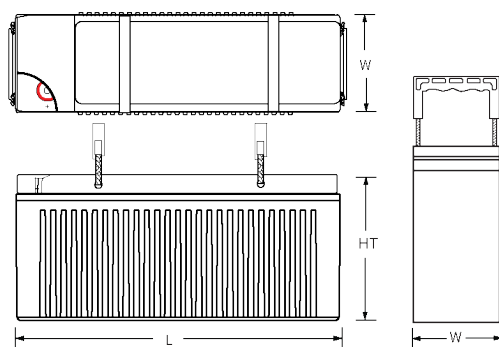

For Further Information

Please refer to our website, www.power-sonic.com, for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.

Approvals



CE marking confirms a product meets EU safety, health, and environmental protection standards for battery and energy systems.



Conflict-free mineral certification ensuring ethical sourcing and transparent supply chain for responsible production.



Extended mineral reporting meets global supply chain transparency standards for responsible and ethical sourcing practices.



IEC 60896 standard ensures stationary lead-acid batteries meet safety, performance, and float charge application requirements.



ISO 9001:2015 certification ensures consistent quality management and manufacturing standards for energy storage products.



PFAS-free certification verifying environmentally responsible manufacturing of batteries and energy storage technologies.



California Proposition 65 compliant, providing consumer safety through reduced chemical exposure in battery manufacturing.



REACH compliant with EU chemical safety standards ensuring restricted substances are controlled in all battery components.



RoHS compliance ensures restriction of hazardous substances in electrical, electronic, and battery-powered products.



Sealed lead-acid batteries classified UN2800 non-spillable, certified safe for air, sea, and ground transport worldwide.



SVHC compliant with EU REACH regulations for Substances of Very High Concern used in electrical and energy storage products.



U.S. EPA TSCA compliance ensures toxic substances are regulated for safe manufacturing of batteries and electronic components.



UL 1989 certified for valve-regulated and vented lead-acid batteries used in UPS, emergency, and backup power applications.



UL Recognized mark certifies safety-tested components for electrical reliability in battery and energy storage systems.