

GFE-MCPE-AI-IP67

ADDRESSABLE MANUAL CALL POINT -OUTDOOR USE



MANUAL 240125

MADE IN PORTUGAL - EU


GLOBAL FIRE EQUIPMENT S.A.

Sítio da Barracha, Parque Industrial Municipal Caixa Postal 610-A, 8150-017 São Brás de Alportel, Portugal | Tel: +351 289 896 560 Mail: info@globalfire-equipment.com | Technical Support: techs@globalfire-equipment.com | www.globalfire-equipment.com


TECHNICAL SPECIFICATIONS						
OPERATING VOLTAGE	Loop Powered 20V to 30V DC					
CURRENT QUIESCENT	650 uA					
CURRENT ALARM	3.5 mA					
TEMPERATURE: OPERATING / STORAGE	-10°C to +55°C / -30°C to +60°C					
STANDARDS	According to EN54-11					
PROTECTION	IP67 - Type A - Outdoor Use / Bucins: M20x1.5 IP65 4-9mm (recommended)					
CABLE SIZE / MAX. HUMIDITY	0.5-1.5mm² / 95% RH Non-Condensing @ 40°C					
COLOUR / CASE MATERIAL	Red / ABS & Clear/ PC - Flame Retardant - Rating 94V0					
DIMENSIONS - SURFACE MOUNTED	111,9 (W) x 111,9 (H) x 81,3 (D) mm					
WEIGHT	262 g includes back box and fixings					
COMPATIBILITY	All GFE addressable systems					
INSTALLATION	Wall mounting					
For EN	154-13 compliance, please check the control panel manual specifications.					

ORDER CODE CERTIFICATE **DESCRIPTION** ADD. MANUAL CALL POINT INC. LOOP ISOLATOR, IP67 - OUTDOOR USE 1328-CPR-0376 / 0359-UKCA-CPR-00202 GFE-MCPE-AI-IP67


MECHANICAL SPECIFICATION







To remove use a MCPE Key and undo both clips on bottom of the call point.





D.I.L. SWITCHES CONFIGURATION

Switches 1-7

Used to configure the Manual Call Point address.

Switch 8

Not used.

Address Switches binary weights

7 ON =64 1 ON =1 4 ON =8


2 ON =2 5 ON =16

6 ON =32 3 ON =4

CONNECTIONS

NOTE: This device is polarised,

Please ensure that both loop connections are kept on the same terminal as shown on the diagram.

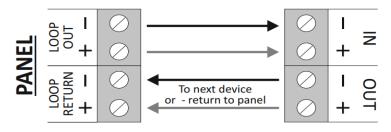

ADDRESS SETTINGS							
01 02	03 04	05	06	07	08		
[0000000]							
09 10	11 12	13	14	15	16		
			0000000		0000000		
17 18	19 20	21	22	23	24		
))(••••••						
25 26	27 28	29	30	31	32		
33 34	35 36	37	38	39	40		
41 42	43 44	45	46	47	48		
) (49999990) (495999						
49 50	51 52	53	54	55	56		
57 58	59 60	61	62	63	64		
65 66	67 68	69	70	71	72		
73 74	75 76	77	78	79	80		
	֓֞֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓						
81 82	83 84	85	86	87	88		
	֖֞֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓						
89 90	91 92	93	94	95	96		
97 98	99 100	101	102	103	104		