




PARADOX


HD10

ALARM VERIFICATION CAMERA

Introducing the HD10, the newest addition to the Paradox security ecosystem. Designed for both indoor and outdoor applications, the HD10 combines reliable performance, durable construction, and clear video monitoring in a single solution.



Manage your camera, customize settings and get instant alerts from the **Paradox BlueEye App** or directly from the **K70M Touchscreen Keypad**.

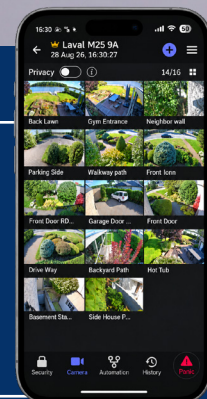



The HD10 delivers Full HD video day and night with intelligent infrared illumination and automatic night mode. Built-in two-way audio enables real-time communication, while advanced image processing provides sharp, distortion-free video in any lighting condition.

Designed for demanding environments, the HD10 features a weather-resistant aluminum housing and operates reliably from -10°C to 40°C. Its modular design allows fast installation on virtually any flat surface.

Connected directly to the Paradox M Series through secure PoE Ethernet, the HD10 provides stable communication, protected configuration, and seamless system integration.

Using the BlueEye App, users can monitor live video, review recordings, customize motion detection, adjust LED brightness, configure audio settings, and manage camera performance from anywhere.

Key Features

- Night-mode control
- Built-in microphone and speaker for real-time communication
- Secure Ethernet connectivity
- Supports external storage for local recording and easy data management
- Weather-resistant design and modular construction
- Video-based motion detection
- Adjustable LED power
- Indoor and outdoor surveillance
- Cloud storage for recordings (subscription basis monthly/yearly)
- Video verification to CMS
- K70M supported



Local View K70M


Live Camera Monitoring from the K70M

Access live video directly from the K70M touchscreen keypad. View up to 30 HD10 cameras, with up to 15 cameras per page, through a clean, intuitive interface that makes it easy to monitor key areas, verify alarms, and stay connected to your property without reaching for a smartphone or computer.

The K70's responsive touch controls make switching between cameras quick and effortless, while

customizable layouts let users organize views around the areas that matter most. Whether checking entrances, outdoor spaces, or other important locations, live video is always just a few taps away.

By bringing security and video together on one touchscreen, the K70M provides a more convenient, connected monitoring experience throughout the Paradox ecosystem.

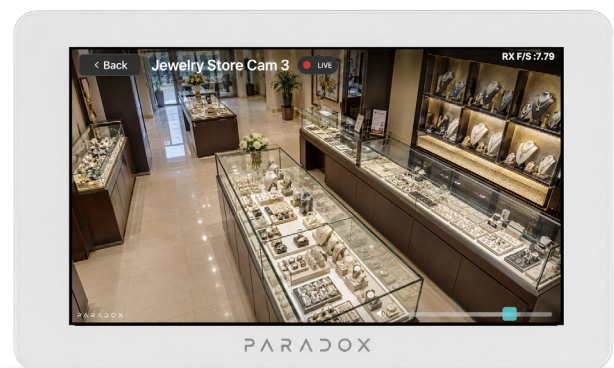

Camera Features

- Live camera view directly from the screensaver
- View up to 30 cameras (15 cameras per page)
- Pinch-to-zoom gesture
- Customizable camera thumbnail order
- Swipe between camera pages
- Adjustable camera audio volume
- Automatic camera cycling (10s, 30s, 1 min, or 2 min)



Easy Installation and Setup



Supports Micro SD Cards up to 128 GB



Specifications

Power Input	Power over Ethernet (PoE); Type 1 (IEEE 802.3af)
Maximum Power Consumption	7W
Micro SD Card Capacity	Up to 128 GB (minimum 16 GB recommended)
Camera Recording Resolution	2 Megapixels
Alarm/Motion Recording Time	Alarm – maximum 5 minutes. Motion – maximum 2 minutes
Image Sensor Type	CMOS
Angle of View (Camera)	Horizontal: 108.3°, Vertical: 59.9°, Diagonal: 126.8°
Video Resolution	2 MP (1920 x 1080, Full HD)
Video Streaming	RTSP, RTP, H.264, MJPEG
Audio	G.711, OPUS
Installation Environment	Indoor/Outdoor
Firmware Upgrade	Remotely over the air, via Swan
Operating Temperature	-10° C to 40° C (14° F to 104° F)
IP Rating	IP56
Auto Learn	Yes
Installation Environment	Indoor/Outdoor
Colors	White
Dimensions	6.7 W x 6.6 H x 14.6 L cm 2.6" W x 2.6" H x 5.7" L
Weight	0.318kg
Certification	CE, FCC, IC, AU